

Model #: DVRT-5MPB



Features:

- 5 MP CMOS image sensor
- High Performance 5MP Resolution
- Compatible with 5MP TVI, 4MP TVI, Analog
- UTC, OSD, WDR, 3D DNR, Smart IR
- 2.8-12 mm Vari-Focal Lens
- 32 Built in IR LEDs, (120 Ft. Night Vision)
- Vandal Resistant IP66 Weatherproof
- True Day/Night
- 3 Years Warranty


We reserve the right to modify product design and specification without notice and whitout incurring any obligation

Technical Specifications

| Model No. | DVRT-5MPB |
|-------------------------|---|
| Camera | |
| Image sensor | 1/2.7" Progressive Scan CMOS |
| Min. illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR /0.014 Lux @ (F1.4,AGC ON),0 Lux with IR |
| Shutter time | 1 / 25 s to 1 / 50,000 s |
| Lens | 2.8-12mm Angle of View: 90.9° - 32 ° |
| Lens mount | M12 |
| Day & night | ICR |
| Digital noise reduction | 3D DNR |
| Wide dynamic range | DWDR |
| Synchronization | Internal synchronization |
| HD Video Output | 1 Analog HD ouput yellow |
| Video | Compatible with 5MP TVI, 4MP TVI, Analog |
| S/N Ratio | More than 52dB |
| Image | |
| Max. Image Resolution | 2592 (H) × 1944 (V) |
| Signal System | NTSC |
| Frame rate | 5MP@30FPS |
| Image settings | Saturation, brightness, contrast, sharpness adjustable through |
| | client software or web browser |
| BLC | Supported |
| General | |
| Operating conditions | (-22°F ~ 140 °F) humidity 90% or less (non-condensing) |
| Power supply | 12 VDC |
| Power consumption | Max. 4W |
| Weather proof rating | IP66 |
| IR range | Up to 120 ft |
| Dimension | 4.69" × 3.94" |
| Weight | 1.54 Lbs |

We reserve the right to modify product design and specification without notice and whitout incurring any obligation

For more information please contact a DSS Sales Representative Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com www.dss-cctv.com

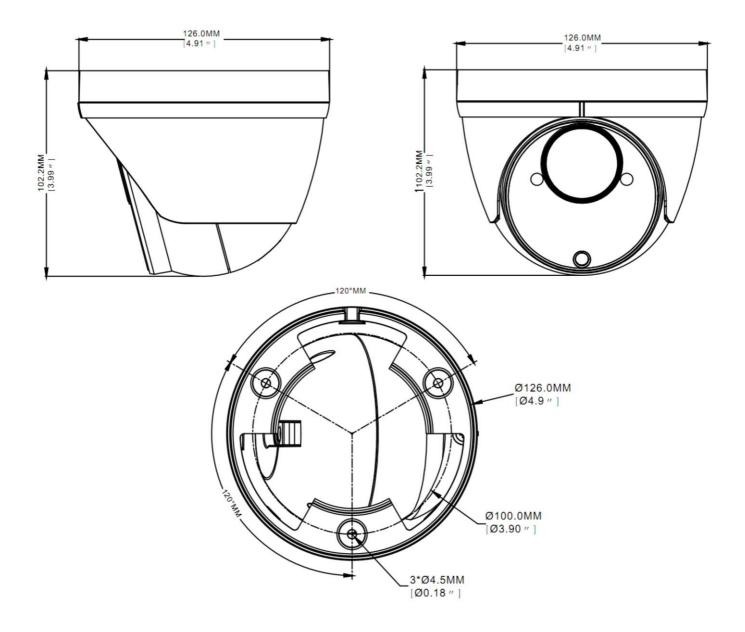

We reserve the right to modify product design and specification without notice and whitout incurring any obligation