


5MP IP IR MINI BULLET POE CAMERA

Model #: IPC-EBFR5MPB

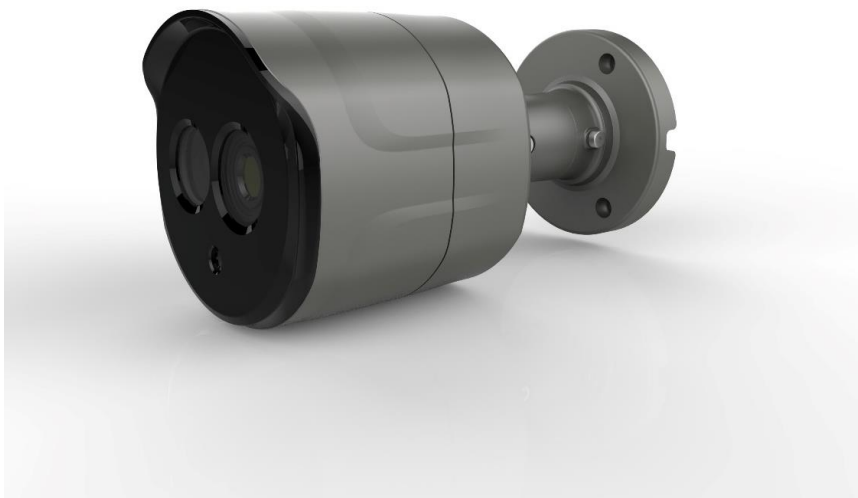

Features:

- 5MP 2592(H)×1944(V)
- HD Video Output
- H.265+ H.264+ Ready, H.264. MJEP
- 3D DNR, BLC, WDR, ICR
- IR Range: Up to 100 ft
- Dual Video Streams
- IP66 Rating
- Metal housing & Bracket
- True Day/Night



We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com
www.dss-cctv.com

Technical Specifications

| | |
|-----------------------------|--|
| Model No. | IPC-EBFR5MPB |
| Camera | |
| Image sensor | 1/2.7" Progressive CMOS |
| Min. illumination | 0.01 lux @F1.2, AGC ON, 0 lux with IR |
| Shutter time | 1/3s ~ 1/10,000s |
| Lens | 2.8mm @F2.0 Angle of view: 109° |
| Lens mount | M12 |
| Day & night | IR cut filter with auto switch |
| Digital noise reduction | 3D DNR |
| Wide dynamic range | DWDR |
| Compression Standard | |
| Video compression | H.264 / MJPEG / H.264+/H.265+ |
| H.264 codec profile | Main profile |
| Bit rate | 32 Kbps ~ 16 Mbps |
| Dual streams | Support |
| Image | |
| Max. Image Resolution | 5MP 2592(H)×1944(V) |
| Frame rate | 60Hz: (1~15fps)5MP(2592×1944),4MP(2592×1520) 3MP(2048×1520),1080P(1920×1080) 960P(1280×960), 720P(1280×720) |
| Image settings | Rotate Mode, Saturation, Brightness, Contrast Sharpness adjustable by client software or web browse |
| BLC | Yes, zone configurable |
| ROI Codec | Support |
| Network | |
| Network storage | NAS (Support NFS,SMB/CIFS), ANR |
| Alarm trigger | Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP,PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6 |
| Interoperability | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI |
| Security | User Authentication, watermark |
| Interface | |
| Communication interface | 1 RJ45 10 M / 100 M Ethernet interface |
| Web Browser | IE 7, IE 8, IE 9 |
| P2P Connection | Built in |
| Mobile App | RXCAMVIEW Android/iPhone |
| General | |
| Operating conditions | (-22°F ~ 140 °F) humidity 95% or less (non-condensing) |
| Power supply | 12 VDC ± 10% , PoE (802.3af) |
| Power consumption | Max. 5W (Max 7W with IR cut filter on) |
| Weather proof rating | IP66 |
| IR range | Up to 100 ft |
| Dimension | 2.7" x 2.7" x 5.5" |
| Weight | 1.1 lbs |


We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com

www.dss-cctv.com

Dimensions

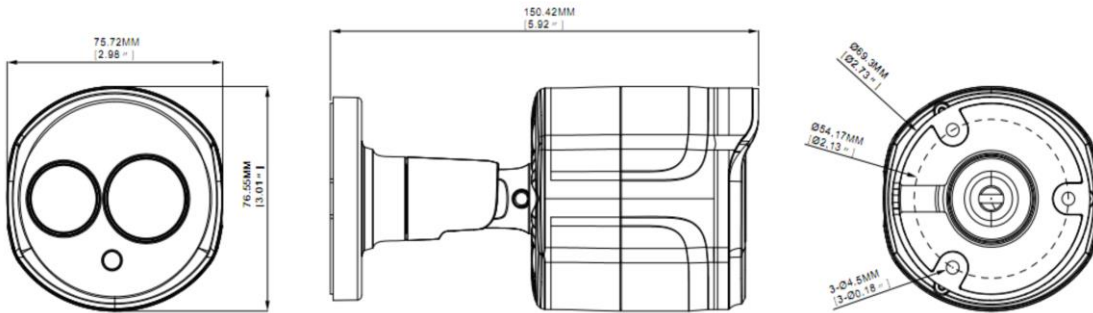

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com

www.dss-cctv.com