

AUTO TRACKING 5MP FULL COLOR NETWORK 20X SPEED DOME

Model #: IPC-PTZ-20X5MPIRW-WL-AT



Features:

- HD 5MP Resolution
- 20x Optical Zoom. 4.7-94MM
- H.265+ H.264+ Ready, H.264. MJPEG
- 8 Built in Warm Light LEDs, (300 ft, FULL COLOR)
- Privacy Masking, 3D DNR, DWDR
- PoE Support Plug in and Play
- IP66 Rating
- Full Color Day & Night
- Auto Tracking

We reserve the right to modify product design and specification without notice and without incurring any obligation



For more information please contact a DSS Sales Representative
Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com
www.dssdepot.com

Technical Specifications

Model No.	IPC-PTZ-20X5MPIRW-WL-AT
Camera	
Image sensor	1/2.5" Progressive CMOS
Image Resolution	2594x1944
Signal System	PAL/NTSC
Min Illumination	0.02 Lux Full Color Day & Night
White Balance	Auto/Manual/ATW/Indoor/Outdoor
AGC	Auto/Manual
S/N Ratio	> 50 db
3D DNR	Support
DWDR	Support
EIS	Support
Backlight Compensation	Support
Shutter Speed	NTSC: 1-1/10,000s
Day & Night	Full Color Day & Night
Optical Zoom	20X
Privacy Mask	8 Privacy Mask, Max 8 Zones can be masked simultaneously
Focus Model	Auto/Manual
Lens	
Focal Length	4.7-94mm
Zoom Speed	Approx. 3s
Angle of View	63.2-3.9 Degree
Min Working Distance	10mm(W)-1000mm(T)
Pan and Tilt	
Pan Range	360°Endless
Pan Speed	45°/s
Tilt Range	0°- 90°(Auto Flip)
Tilt Speed	30°/s
Number of Preset Position	256
Patrol	8 Patrols, Up to 32 Presets per patrol256
Pattern	4 Patterns, with total recording time no less than 10 mins
Power-off Memory	Support
Park Action	Preset/Patrol/Pattern/Pan Scan/Tilt Scan/Random Scan
PTZ Position Display	On/Off
Color Mode	
Warm Light	8 Warm Lights
Light Distance	300 Ft
Light Intensity	Auto adjusted
Network	
Onvif	Support
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP,
Dual Streams	Support
Security	User Authentication, Host Authentication
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
User/Host level	Up to 32 users, 3 Levels: Administrator, Camera control, Live view only
Web Browser	IE 7, IE 8, IE 9
Camera Control	Pan / Tilt, Zoom, Focus, Click centering, Drag zoom, Iris, Preset position call
Protocols	Self-adaptive
General	
Menu Language	English
Power	DC 12V 4A, Day 10W (MAX), Night 30W(MAX)
Working Temperature	-20°C-60°C, ≤90%RH(frostless)
Mounting	Wall Mount Included
Weather proof rating	IP66, TVS 3,000V lightning protection, surge and voltage protection
Dimensions	310*310*430MM
Weight	2.29Kg (5.05 lbs)

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative
Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com
www.dssdepot.com

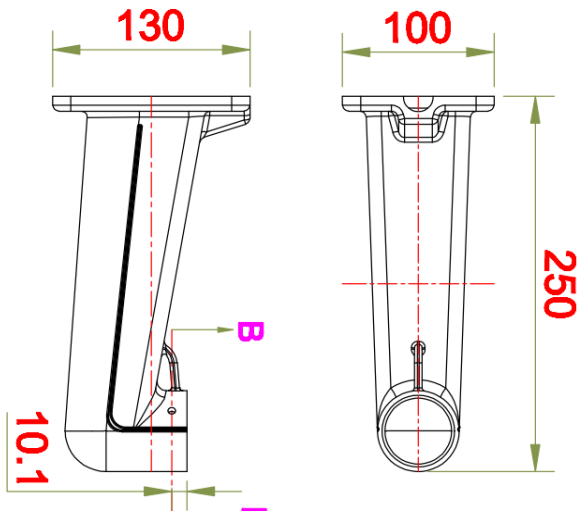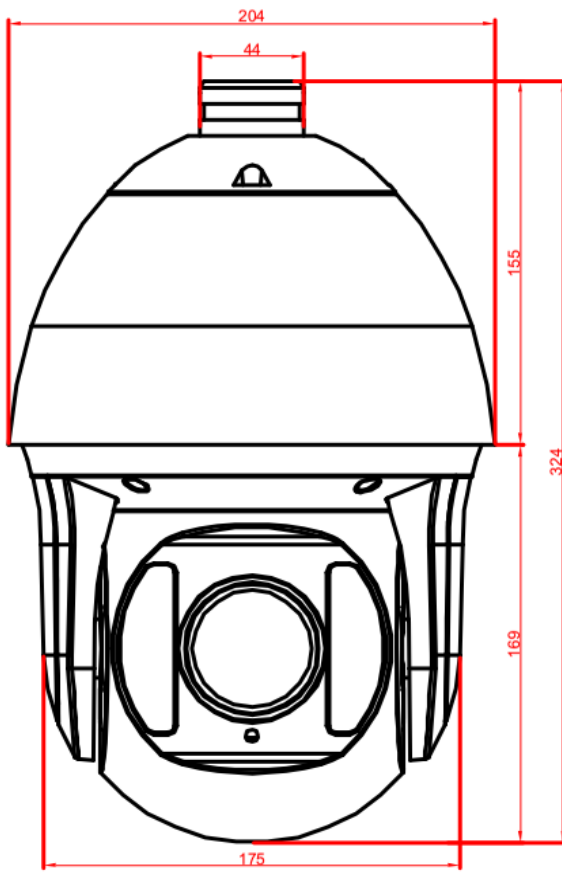

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative
Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com
www.dssdepot.com