

5 MP Network IR 5X Speed Dome

Model #: IPC-4XPTZ4MP




Features

- 1/2.9" Progressive Scan CMOS
- 5x Optical Zoom, 2.7-13MM
- HD 5MP Resolution
- 3 Built in High IR LEDs, (70 Ft. Night)
- Privacy Masking, 3D DNR, DWDR, Smart IR
- PoE Support Plug in and Play
- Weather Proof, IP66 Rating
- True Day/Night
- 3D Intelligent Positioning
- 3 Years Warranty

Technical Specifications

Model No.	IPC-4XPTZ4MP
Camera	
Image sensor	1/2.9" PROGRESSIVE CMOS
Image Resolution	3072x1728
Signal System	PAL/NTSC
Min Illumination	Color: 0.02 Lux @(F1.6, AGC ON) B/W: 0 Lux With IR ON
White Balance	Auto/Manual/ATW/Indoor/Outdoor
AGC	Auto/Manual
S/N Ratio	> 50 db
Function	3D DNR DWDR BLC ICR
Shutter Speed	NTSC: 1-1/10,000s
Day & Night	IR Cut Filter
Optical Zoom	5x 2.7-13MM
Privacy Mask	8 Privacy Mask, Max 8 Zones can be masked simultaneously
Focus Model	Auto/Manual
Lens	
Focal Length	2.7-13mm , 5X
Zoom Speed	Approx. 3s
Angle of View	106.6-51.8 degree
Min Working Distance	10mm(W)-1000mm(T)
Aperture	F1.6 -F4.4
Pan and Tilt	
Pan Range	355° Endless
Pan Speed	Pan Manual Speed: 0.6°~200°/s
Tilt Range	0°- 90° (Auto Flip)
Tilt Speed	3.5°~35°/s
Number of Preset Position	256
Power-off Memory	Support
Park Action	Preset/Patrol/Pattern/Pan Scan/Tilt Scan/Random Scan
PTZ Position Display	On/Off
IR Night Vision	
IR LEDs	3 IR LEDs
IR Distance	70 Ft
IR Intensity	Auto adjusted, Smart IR
Network	
Network storage	NAS (iSCSI optional)
Audio Compression	G.711ulaw / G.711alaw / G.726
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP,
Dual Streams	Supported
Security	User Authentication, Host Authentication
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
User/Host level	Up to 32 users , 3 Levels: Administrator, Camera control, Live view only
Web Browser	IE 7, IE 8, IE 9
Camera Control	Pan / Tilt, Zoom, Focus, Click centering, Drag zoom, Iris, Preset position call and
Protocols	Self-adaptive
General	
Operating conditions	(-22°F ~ 149 °F) humidity 90% or less (non-condensing)
Power supply	12 DC 2 AMP
Power consumption	Max. 30W (IR On), Max. 21W(IR Off)
Weather proof rating	IP66, TVS 3,000V lightning protection, surge and voltage protection
Mounting	Various mounting modes optional
Dimension	2.4 x 2.4 x 2 inches
Weight	1.52 lbs

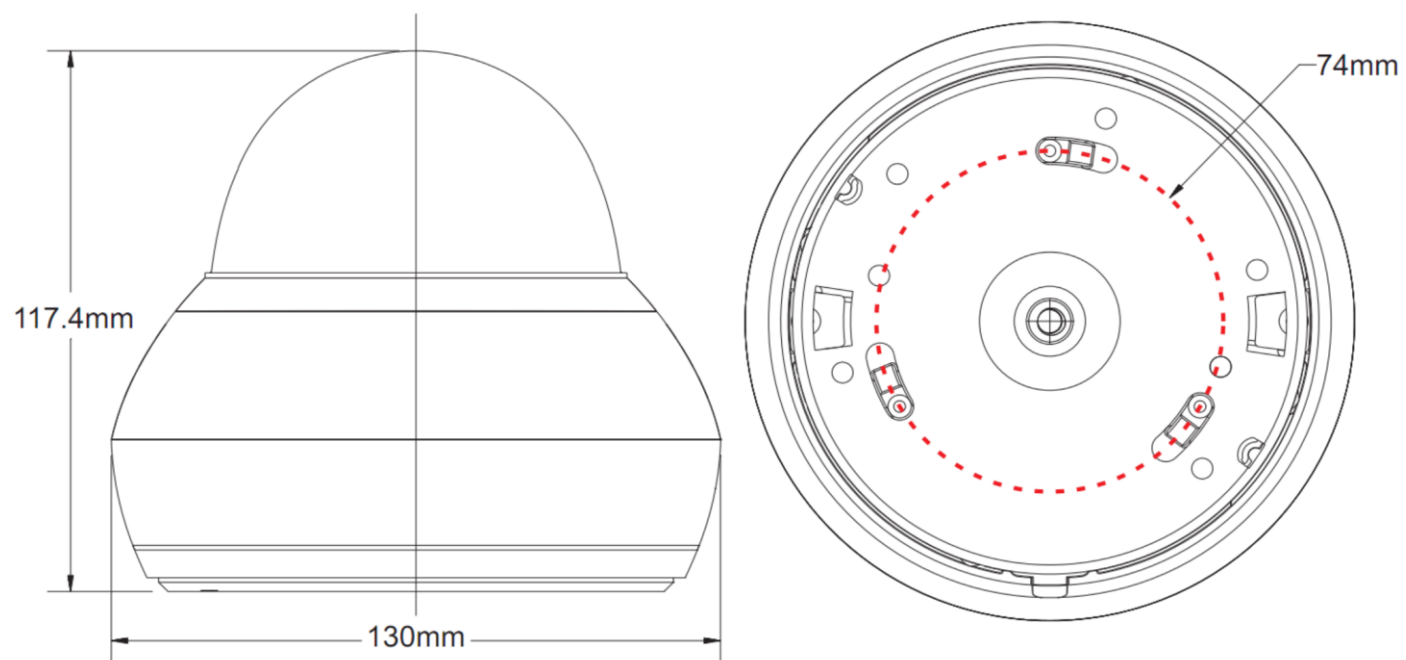

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com

www.dss-cctv.com