


4K 32Ch Embedded Plug & Play 16 POE Port NVR

Model #: NVR-6732P16

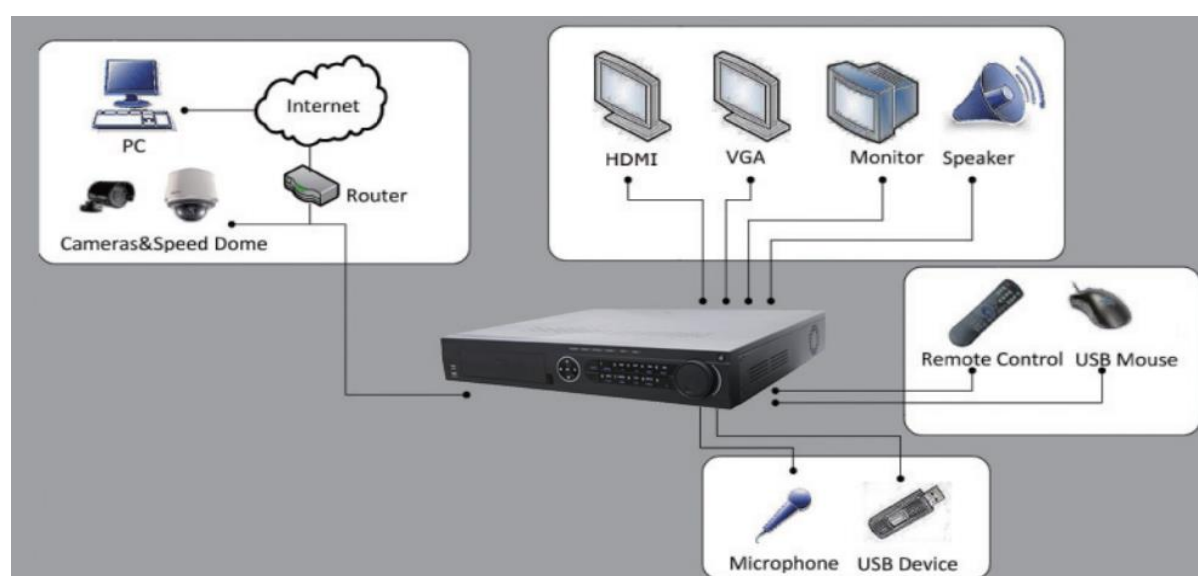


Features

- Up to 12 Megapixels resolution recording
- Support 1-ch HDMI, 1-ch VGA, HMDI at up to 4K(3840x2160)
- 256M incoming bandwidth
- Up to 4 SATA interfaces
- Plug & Play with up to 16 independent PoE network interfaces
- Support dual-os to ensure high reliability of system running
- Support various VCA detection alarm and VCA search
- Support H.265/H.264/MPEG4 video formats

Technical Specifications

Model No.	NVR-6732P16	
Video/Audio input		
Video compression	H.264, H264+, H265	
Incoming Bandwidth	256 Mbps	
Outgoing Bandwidth	256 Mbps	
IP video input	32-ch	
Audio compression	OggVorbis	
Audio Output	2-ch, BNC (Linear, 600Ω)	
Two-way audio input	1-ch, BNC (2.0 Vp-p, 1 kΩ)	
Video /Audio output		
HDMI output	1-ch, resolution: 4K(3840*2160)/60Hz,4K(3840*2160)/30Hz,1920*1080P/60Hz,	
VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 x 576, NTSC: 704 x 480	
Video spot output	N/A	
Encoding resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF	
Frame rate	30 fps	
Video bit rate	32 Kbps ~ 8192 Kbps, or user defined (Max. 8192 Kbps)	
Audio output	2-ch, BNC (Linear, 600 Ω)	
Audio bit rate	16 Kbps	
Dual-stream	Support (Sub-stream at CIF / QCIF: 30fps)	
Stream type	Video, Video & Audio	
Playback resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF	
Synchronous playback	32-CH	
Hard Disk		
SATA	4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4HDDs	
eSATA	1 eSATA interface	
Capacity	Up to 8TB capacity for each disk	
Interface		
Network interface	1 RJ45 10M / 100M / 1000MEthernet interface independent 100 Mbps PoE network interfaces	8
Serial interface	1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface (for PTZ control); 1 RS-485 keyboard interface (for special keyboard control)	
USB interface	3 x USB2.0	
Web Browser	IE 7, IE 8, IE 9, Chrome 8 +, Firefox 3.5 +, Safari 5 +	
Alarm in/out	16/4	
General		
Power supply	100 ~ 240 VAC, 6.3A, 50 ~ 60Hz	
Consumption	≤45 W	
Working temperature	14°F - 131°F	
Working humidity	10% ~ 90%	
Chassis	19-inch rack-mounted 2U chassis	
Dimensions	440 x 390 x 70 mm	
Weight	≤8kg (without hard disk or DVD-R/W)	

Rear Panel

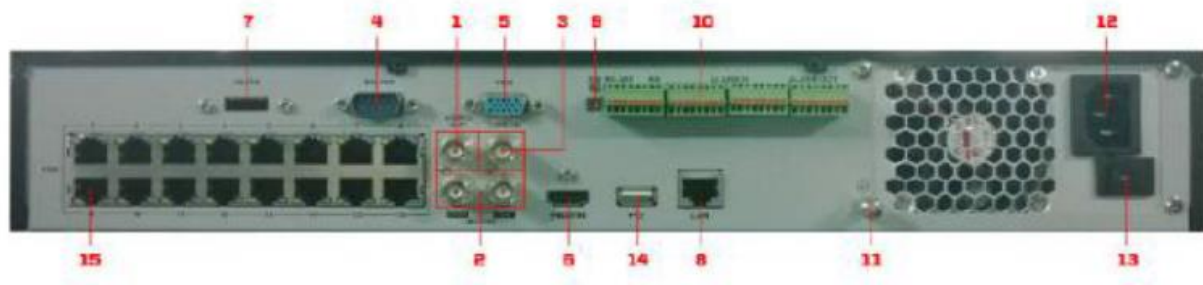

1. Video out
2. CVBS Audio out and VGA audio out
3. Line in
4. RS-232 interface
5. VGA interface
6. HDMI Interface
7. eSATA interface
8. LAN interface
9. Termination switch
10. RS-485 interface, Controller ports, Alarm in and Alarm out
11. Ground
12. AC 100V ~ 240V
13. Power
14. USB interface
15. Network interfaces with PoE function

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com

www.dss-cctv.com