


4CH EMBEDDED Plug & Play POE NVR

Model #: NVR-5204P4

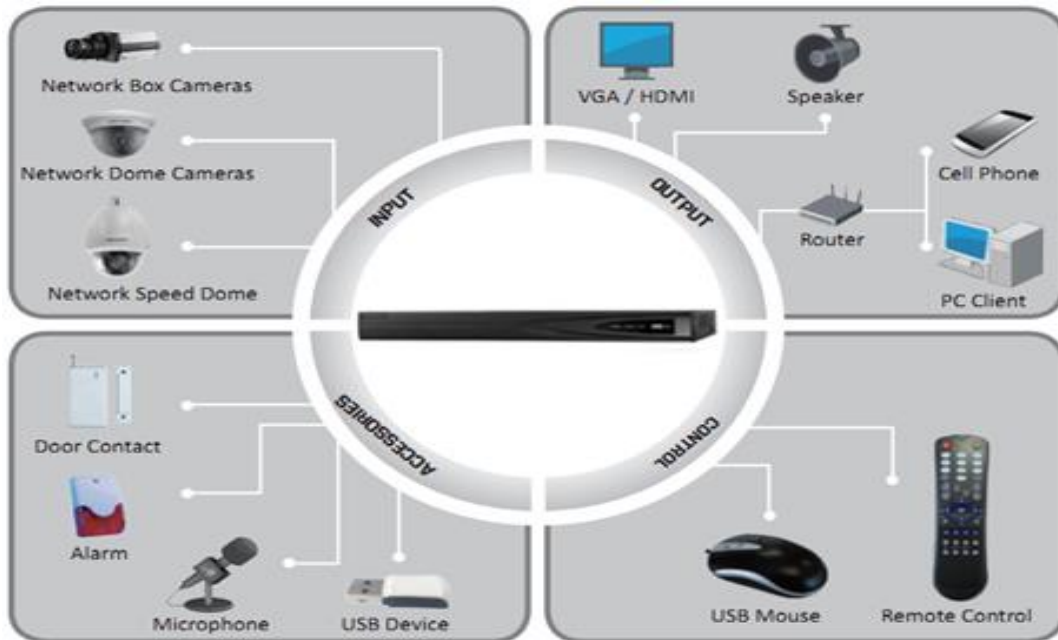

Features

- 4-ch video input
- 4 independent PoE network interfaces plug in & play
- HDD quota and group management
- Up to 6 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 4-ch synchronous playback

Technical Specifications

Model No.	NVR-5204P4
Video/Audio input	
Video compression	H.264, H264+
Video input	4-ch
Incoming Bandwidth	40 Mbps
Outgoing Bandwidth	80 Mbps
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
Video /Audio output	
HDMI output	1-ch, resolution: 1920 x 1080P /60 Hz ,1600 x 1200 /60 Hz, 1280 x 1024 /60 Hz, 1280 x 720 /60 Hz, 1024 x 768 /60 Hz
VGA output	1-ch, resolution: 1920 x 1080P /60 Hz ,1600 x 1200 /60 Hz, 1280 x 1024 /60 Hz,1280 x 720 /60 Hz, 1024 x 768 /60 Hz
CVBS output	N/A
Video spot output	N/A
Recording resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCI
Frame rate	30 fps
Video bit rate	32 Kbps ~ 8192 Kbps, or user defined (Max. 8192 Kbps)
Audio output	1-ch, RCA (Linear, 600 Ω)
Audio bit rate	16 Kbps
Dual-stream	Support (Sub-stream at CIF / QCIF: 30fps)
Stream type	Video, Video & Audio
Playback resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCI
Synchronous playback	4-ch 1080P
Hard Disk	
SATA	1 SATA interfaces
Capacity	Up to 6TB capacity for each disk
Interface	
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface 4 independent 10 / 100 Mbps PoE Ethernet interfaces
Web Browser	IE 7, IE 8, IE 9, Chrome 8 +, Firefox 3.5 +, Safari 5 +
Serial interface	1 RS-485 half-duplex interface
USB interface	2 x USB2.0
Alarm in/out	N/A
General	
Power supply	12V DC
Consumption	≤10 W
Working temperature	14°F - 131°F
Working humidity	10% ~ 90%
Chassis	1U chassis
Dimensions	12.4x9.1x1.8 Inch
Weight	< 2.2 Lb

Rear Panel of NVR



1. LAN Network Interface
2. RS-485 Interface
3. 100 ~ 240 VAC Power Input
4. Power Switch
5. USB Interface
6. GND
7. HDMI Interface
8. VGA Output
9. Audio In
10. Audio Out
11. Network Interfaces with PoE function

We reserve the right to modify product design and specification without notice and without incurring any obligation

For more information please contact a DSS Sales Representative

Toll Free: 1.888.467.8812 · Fax: 1.609.431.0932 · Email: sales@dss-cctv.com

www.dss-cctv.com